

# Installation recommendation

## Sand mats CONNECTION SET, 2 METERS

The sand mat connection set makes it easy to connect two rolls cleanly and securely.

*EcoTrade Leipzig GmbH is not responsible for material defects caused by incorrect installation or failure to follow the installation recommendations.*

## Contents

2 sand mats Plastic connecting profiles, 2 m 26  
connecting screws with flange ISO 7380-2 M6 x 25  
mm – stainless steel V2A

26 lock nuts M6 DIN 985 – stainless steel V2A

26 washers 6.6x18mm – stainless steel V2A 10

U-pins, galvanized, 400 x 160 x 400mm

## Instructions

### 1. Step

Cut the sand mat to the desired length. Make sure that the cut is clean and as close to a right angle as possible so that the connecting profile can be securely fastened.

### 2. Step


Place the profiles at the end of the roll and make sure that the screw holes are exactly aligned.

### 3. Step

Now screw the profile to the sand mat. Insert the screw from above through the mesh structure of the sand mat and then fasten it on the underside with the washer and lock nut.

### 4. Step

Roll out the sand mat at the desired location and secure it in the sand using the ground anchors. Position the pins so that two rolls can be secured at the same time with a U-pin. Please also note the installation instructions.

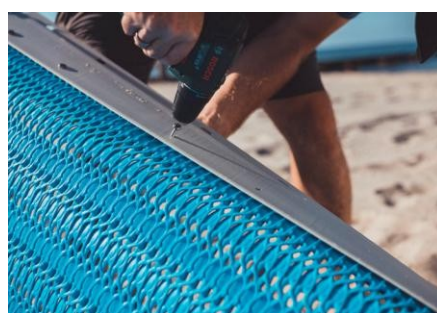

### Note

Before rolling out the mat, we recommend smoothing out the sand so that the sand mat can be laid on a level surface. You can then secure the sand mat using the U-pins. Fill any remaining gaps with sand. Sweep the sand into the open structure of the sand mat.

As part of constant improvements and innovation, EcoTrade Leipzig GmbH reserves the right to change these specifications without official notice.