


Strong Heavy-Duty Panel Data

Sheet

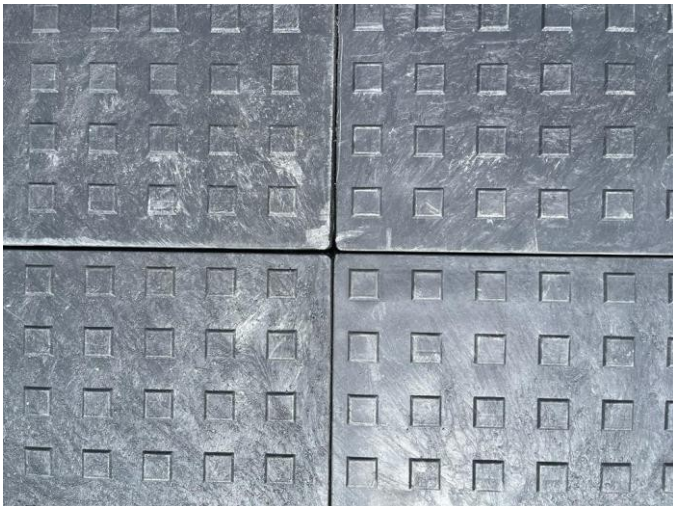

Description

Thanks to its high load-bearing capacity, quick installation and removal, and easy cleaning, the Strong heavy-duty panel is perfectly suited for temporary driveways and parking lots.

The Strong heavy-duty panel is very well suited for animal husbandry, even for heavy animals. It is easy to clean and therefore hygienic; it is quick and easy to install and can thus be flexibly adapted to the requirements of zoos and animal parks.

The animals have a secure and comfortable footing on the panels, which significantly reduces the risk of injury.

Function

The Strong heavy-duty panel is easy to install. The surrounding tongue-and-groove joint prevents the individual panels from shifting sideways. No additional fastening is required.

The tiles are flame-retardant and offer high chemical resistance.

The Strong heavy-duty panel is very easy to clean thanks to a new design on the underside.



Advantages

- Excellent thermal insulation
- Chemical resistance
- Quick and easy installation
- High stability and slip resistance

Applications

- Mobile parking areas, turning areas
- Agriculture, industry
- Stables
- Warehouses, logistics
- Event spaces
- Turf protection for large areas (stadiums)
- Gardens, landscaping
- Construction sites

Strong Heavy-Duty Panel Data

Sheet

Technical specifications

Technical properties	
Slab weight	32.0 kg
Panel size	1,200 x 800 x 43 mm
Net usable area after installation	0.88 m ² (1,160 x 760 mm)
Accessories	Spacer wedges 400 x 100 x 43 mm
Material	PVC (100% recycled plastic)
Color	Black
Top surface texture	Non-slip coin profile
Bottom texture	Support rings
Fire class (DIN 4102)	B1 (flame-retardant) according to DIN 4102, Part 14 Dfl - s2 according to EN 13501-1 / 2007
Thickness	43 mm
Load capacity (depending on the substrate)	up to 330 t/m ²
Weight per unit area	36.36 kg/m ²
Packaging	30 pallets per pallet (26 m ² coverage)
UV resistance	Yes
Item No.	065613

Special features

- All-around tongue-and-groove system for a secure fit
- Quick and easy to install
- Compact storage and reusable multiple times
- Chemical resistance
- High slip resistance
- Good thermal insulation

As part of its continuous improvement process, EcoTrade Leipzig GmbH reserves the right to change the specifications listed here without notice.